


PUY-M42VKA-TH
PUY-M42YKA-TH

PUY-M48VKA-TH
PUY-M48YKA-TH

PUY-M36YKA-TH

Unit: mm

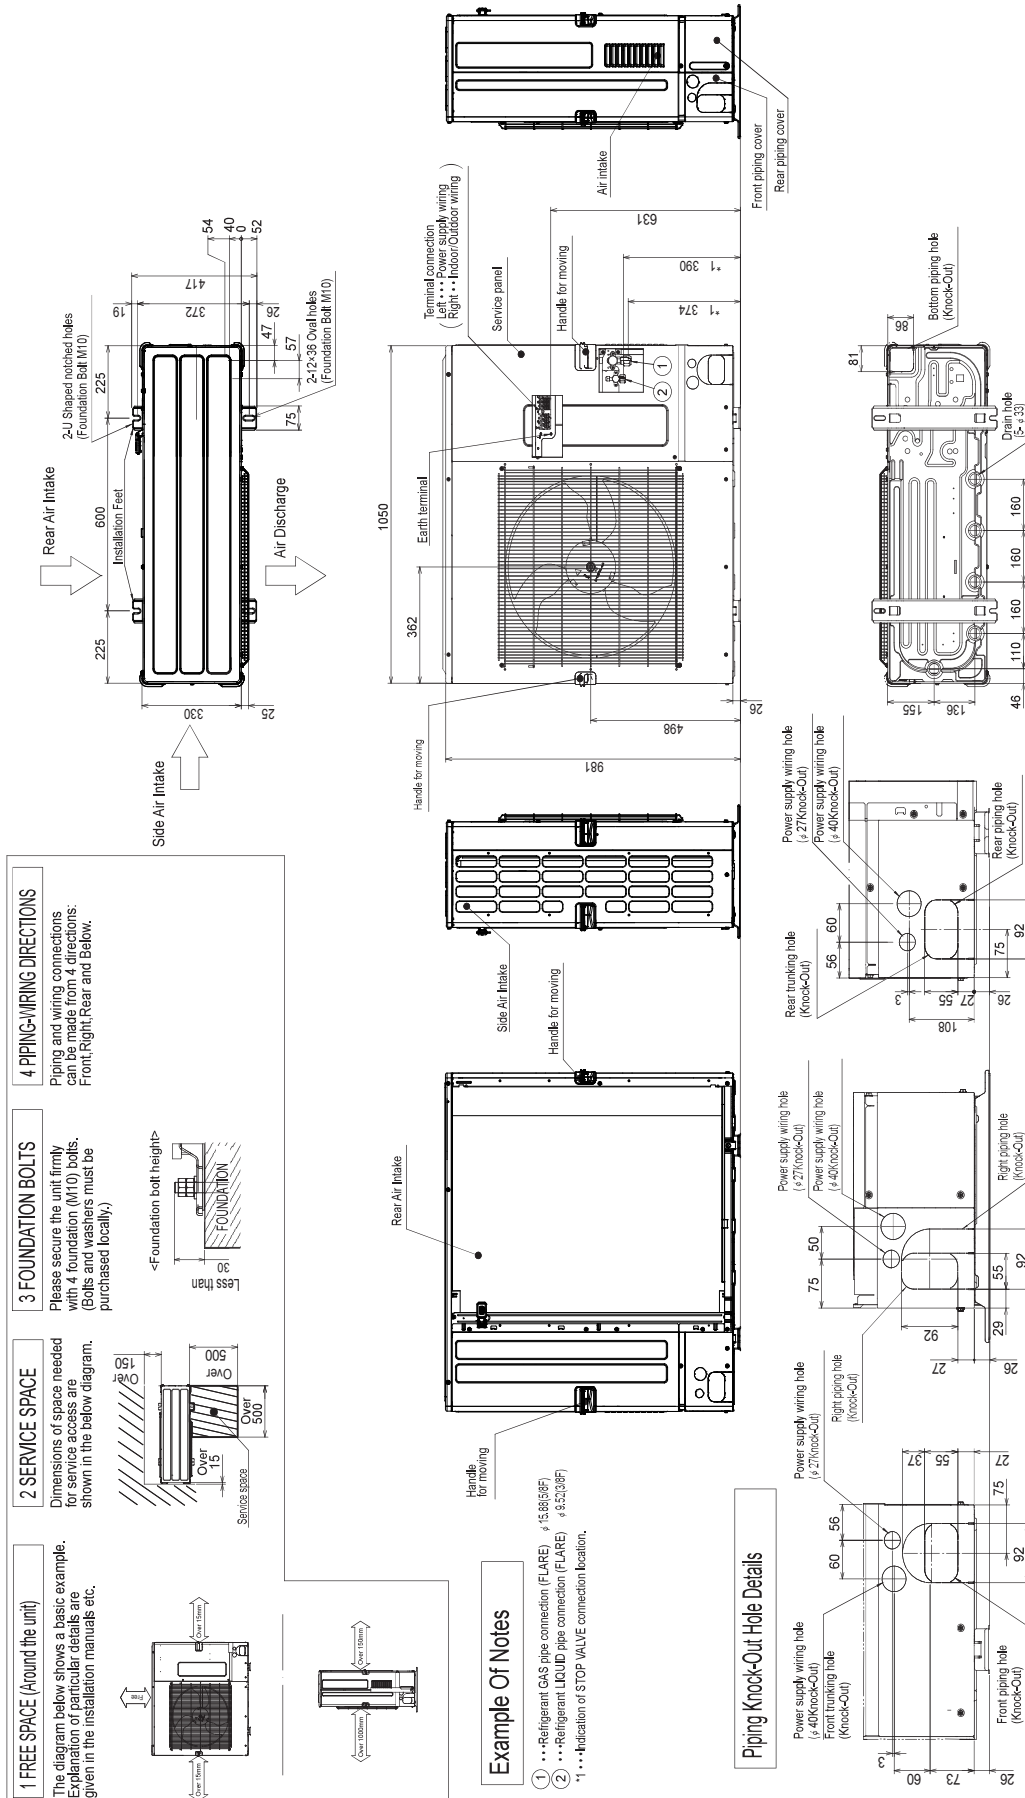


4 PIPING-WIRING DIRECTIONS

Piping and wiring connections can be made from 4 directions: Front, Right, Rear and Below.


3 FOUNDATION BOLTS

Please secure the unit firmly with 4 foundation (M10) bolts. (Bolts and washers must be purchased locally.)




2 SERVICE SPACE

Dimensions of space needed for service access are shown in the below diagram.



1 FREE SPACE (Around the unit)

The diagram below shows a basic example. Explanation of particular details are given in the installation manuals etc.



Example Of Notes

- ① ...Refrigerant GAS pipe connection (FLARE) ø15.8(ø6F)
- ② ...Refrigerant LIQUID pipe connection (FLARE) ø5.2(ø2F)
- *1 ...Indication of STOP VALVE connection location.

Piping Knock-Out Hole Details

